

Wet processing

**From waste to
valuable resource**





Unlock hidden values in surplus material

Adjustment of machine sand for concrete production. Making marketable products from surplus fractions. Recycling. The need for washing and adjusting screening curves can have several causes. Maskin Mekano offers the versatile FC program, highly compatible with our standard machines. The combination possibilities are many. We can build the plant completely stationary, completely mobile or as a combination of both. Water management can be designed as simply in/out or completely recircular. There are several different forms of sedimentation solutions depending on access to water and space. Fresh water equivalent to evaporation must of course always be available regardless of the recycling rate.



The process is characterized by reliability, energy efficiency and low water consumption.

- **Low production costs – energy consumption 11 kW**
- **Easy maintenance – very few moving parts**
- **Easily calibrated – the result depends on the amount of added water**
- **Versatile concept – stationary, mobile or semi mobile**
- **Easy to frost proof – designed for Scandinavian climate**
- **Versatile solutions for recirculation of water – with or without flocculants**



BML 7^s / FC 25

**A small adjustment of the grading curve
A big difference in the value of the product**

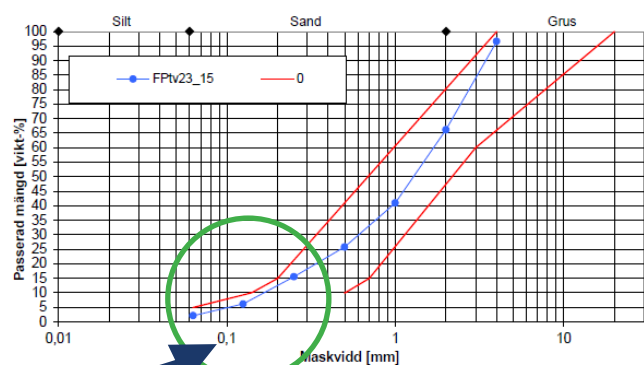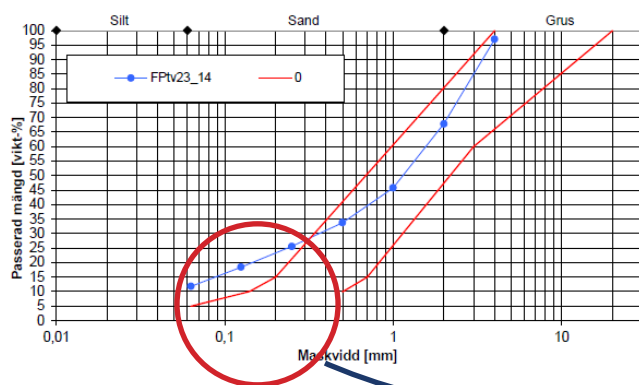



Your partner for productivity

maskin mekano

Address: Maskin Mekano AB, Box 9083, 550 09 Jönköping, SWEDEN,

Phone: + 46 36 31 74 00

E-mail: info@maskinmekano.se

www.maskinmekano.se